




## Frequency Meter & DC Milliammeter

## OZQ and OMQ

### TECHNICAL FEATURES

- ✎ DIN 72 AND 96mm FREQUENCY METERS TO BS89, IEC51 & VDE 0419. ALL EMPLOY ELECTRONIC TRANSDUCERS, AND HAVE AN ACCURACY TO CLASS 1.5
- ✎ DIN 72 & 96mm MILLIAMMETERS FITTED WITH SCALES GRADUATED 0 -100%, AND THREE BASIC MOVEMENTS OF 0 to 1, 0 to10, & 4 to 20mA
- ✎ MANUFACTURED WITH MOVING COILS TO BS89, VDE0410 DIN 43700, & IEC51. THEY CAN BE USED WITH EXTERNAL CURRENT INPUTS SUCH AS SHUNTS, RESISTORS AND TRANSDUCERS
- ✎ ALL MODELS SUPPLIED WITH SCALE FITTED

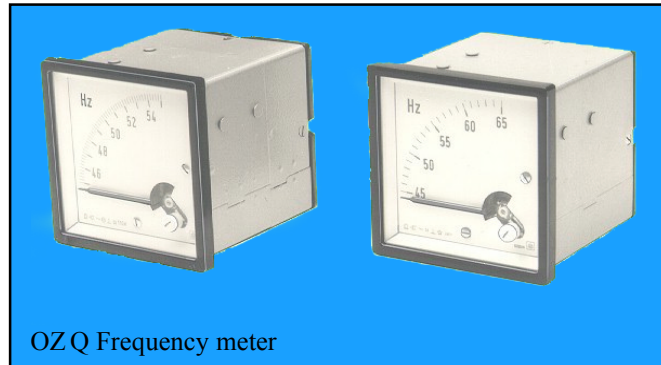

OZQ Frequency meter

### FREQUENCY METERS - FITTED SCALE

ORDER TYPE	AC VOLTAGE	DIN SIZE mm	SCALE RANGE Hz
OZQ	120V or 230V	72 or 96	45-55
	120V or 230V	72 or 96	45-65
	120V or 230V	72 or 96	55-65



OMQ Milliammeter

### DC MILLIAMMETERS -FITTED SCALE



ORDER TYPE	METER MOVEMENT	DIN SIZE mm	SCALE MARKING
OMQ	0 - 1mA	72 or 96	0-100%
	0 - 10mA	72 or 96	0-100%
	4 - 20mA	72 or 96	0-100%

### ORDERING DETAILS

OZQ	72mm	VOLTS	SCALE RANGE Hz
	96mm		

OMQ	72mm	CURRENT	
	96mm		

### DIMENSIONS & MOUNTING DETAILS



Dimensions

A	B	C
72mm	72mm	53mm
96mm	96mm	53mm

Panel cut-out for 72mm is 68 x 68mm.  
Panel cut-out for 96mm is 92 x 92mm.

Dimensions in mm.